


TELEPHONE 706 I/C - INTERCOM

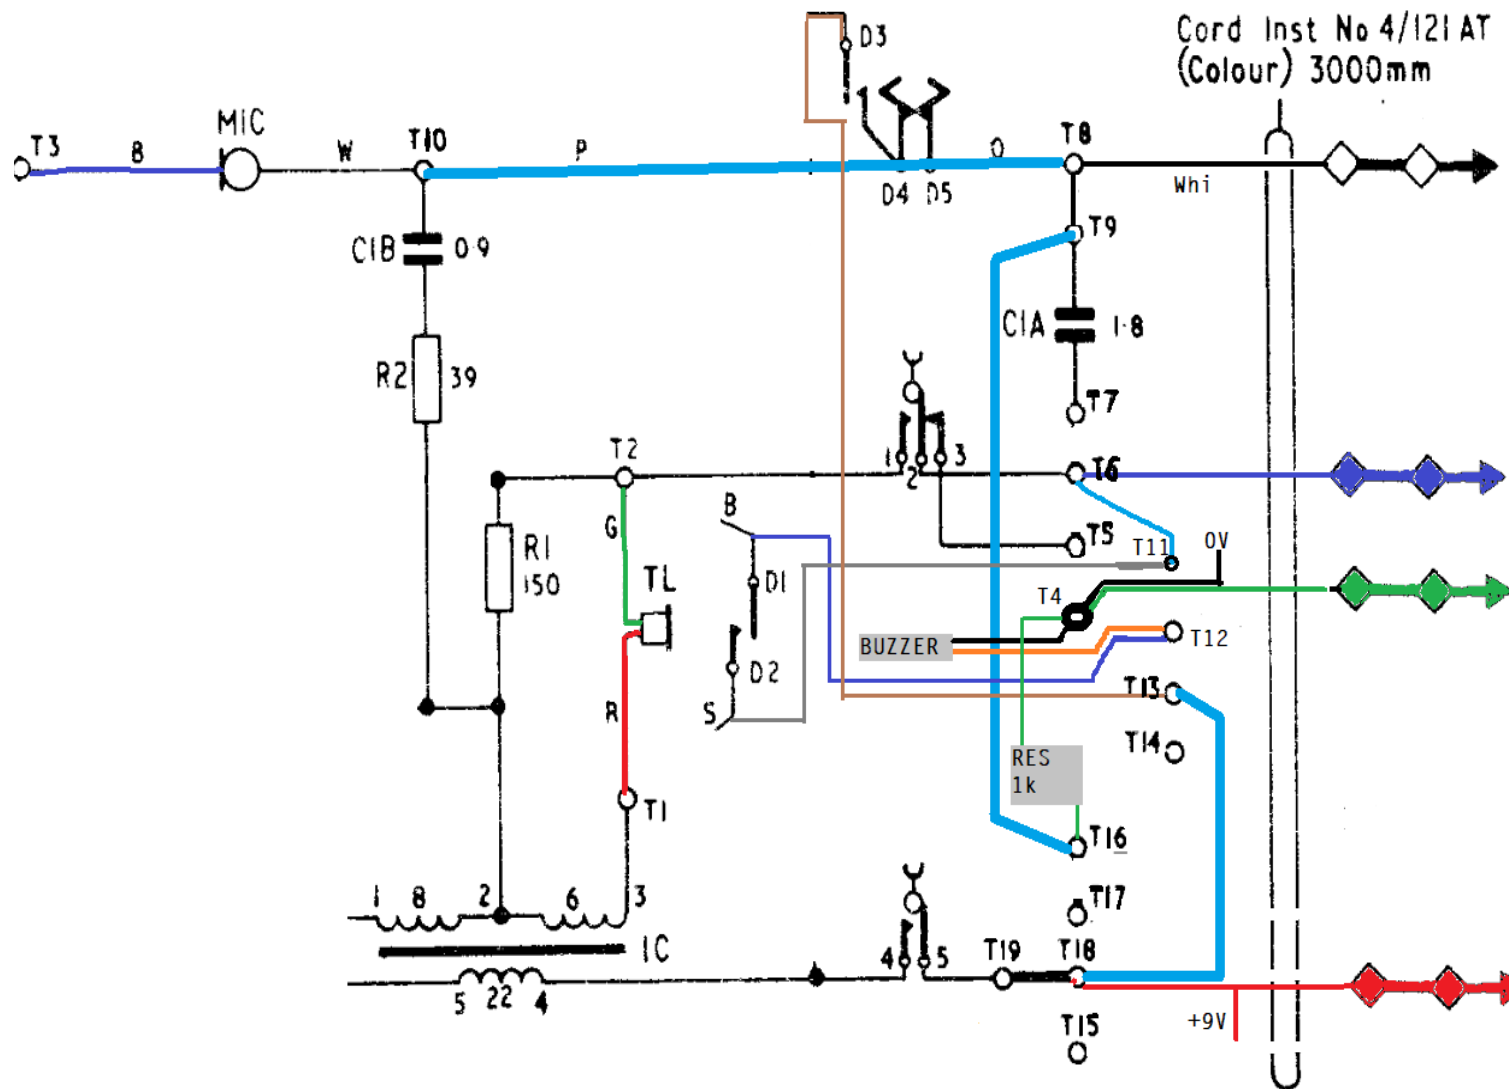

1. Handset cord as 706
2. Regulator removed. Bell motor removed. Dial cord rewired to Tags.
3. Strap: T8-9, T18-19, Link: T13-19, T9-16, T8-10, T6-11
4. Insert Res 1k 5% (brown-black-red-gold) T4-T16.
5. Dial Grey (Slate) T11, Blue T12, Brown T13.
6. Buzzer Orange (+) T12, Black (-) T4.
7. 9 volt + T19, - T4 (master only)
8. Line cord Green T4, Blue T6, Whi T8, Red T18.

QUICK REF:

T4 Line Green, Buzzer Black (-), Battery -.
T12 Dial Blue, Buzzer Orange (+)